





Installation Instructions Super Grip Stake System

MATERIALS REQUIRED:

1. Super Grip Stake
2. Super Grip Stake Tool Kit
 - a. Driver
 - b. Extension Sleeve
 - c. Ground Driving Plate
3. (OPTIONAL) Bronze or Aluminum Cap
4. (OPTIONAL) Rhino SoilMarker
5. Hammer

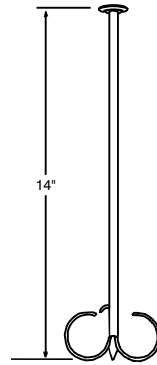


SoilMarker™ Disk Cap



7" Diameter

INSTALLATION:

1. Place the marker head in the required position and drive the spike into the ground using the driving tool and a suitable hammer. (OPTIONAL) Drive the spike through the center insertion point of the Rhino SoilMarker for better visibility.
2. Stop driving the spike when the bottom of the driving tool handle is 1 inch (25 mm) above the top of the head of the marker (stop position) and remove the driving tool.
3. Place the sleeve down the inside of the spike.
4. Drive the sleeve downwards with the hammer. This action ensures that: a) the head of the marker is firmly held in place by a positive downward pressure; b) the driving of the strong anchor prongs into the soil will firmly anchor the spike.
5. Discontinue driving the sleeve when the base of the handle is about 1 inch (25 mm) above the top of the marker head (stop position).
6. Remove the driving tool.
7. (OPTIONAL) Tap an aluminum or bronze cap into the spike.

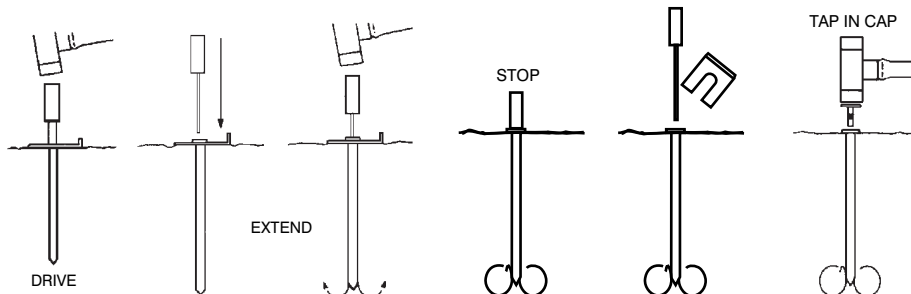

SUPERGRIP_INST • 6-13-08